

PCT/IB04/51789

IB04/51789



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 14 OCT 2004	
WIPO	PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103588.4

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03103588.4
Demande no:

Anmeldetag:
Date of filing: 29.09.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

System, station, device and method obtaining quantities

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G01S13/74

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

System, station, device and method obtaining quantities

FIELD OF THE INVENTION

The invention relates to an interrogation system comprising a station for obtaining a quantity of a passive device by interrogating the passive device.

5 The invention also relates to a station and a device for use in such an interrogation system.

The invention also relates to a method of obtaining a quantity of a passive device.

BACKGROUND OF THE INVENTION

10 Such an interrogation system is known from the frame labeled "Panel 2. First use of modulated backscatter", Bell Labs Technical Journal, Autumn 1996, page 210, the frame being part of the article "A Low-Cost Radio for an Electronic Price Label System", Bell Labs Technical Journal, Autumn 1996, pages 203-215.

15 The frame describes a wireless system used for eavesdropping the American Embassy in Moscow. In this system, a station transmits a radio wave with a frequency of 330 MHz to a passive device with a cavity resonant at the frequency. An acoustic diaphragm of the device causes a modulated backscattered signal, carrying the ambassador's voice.

It is a disadvantage of the known interrogation system that it is sensitive to interference from other radio frequency sources with the same frequency.

20

SUMMARY OF THE INVENTION

It is an object of the invention to provide a system of the kind described in the opening paragraph which is relatively insensitive to interference from other radio frequency sources.

25

This object is realised in that the station comprises: transmitting means for transmitting an electromagnetic pulse; receiving means for receiving from the passive device a modulated ultra wide band reflection of the electromagnetic pulse; demodulating means for demodulating the reflection and obtaining the quantity, the demodulating means being coupled to the receiving means, and in that the passive device is arranged for transmitting the

modulated ultra wide band reflection to the station, the passive device comprising a cavity for modulating the reflection in dependence of the quantity, the cavity having a physical property, the physical property being dependent on the quantity.

Because a modulated ultra wide band reflection of the electromagnetic pulse spreads its energy over many frequencies, the system is relatively insensitive to interference from other radio frequency sources. Another advantage is that the passive device can be relatively small, particularly when relatively high frequencies are used. A further advantage is that the system may comprise a plurality of passive devices that can be interrogated simultaneously, without requiring a directive antenna emitting the electromagnetic pulse.

The transmitted pulse can have an ultra wideband of radio frequencies, but it can also be a light beam. The pulse typically has a duration in the order of nanoseconds, obtaining a spectral energy density with a frequency range with a lower limit and an upper limit. The lower limit is in the range from a GHz to the THz range. The upper limit is in the range from tens of GHz to hundreds of THz.

The cavity may substantially have the shape of a regular body, for example a sphere, a hemisphere, a cylinder, or a polyhedron. The cavity may be open or closed. The physical property of the cavity can be one or more of its dimensions, but may also be another property, for example a property of the media filling the cavity or surrounding the cavity, for example surface conductivity or magnetic susceptibility. The cavity has at least one resonance frequency, that is modulated in dependence of the property. The cavity may be a Fabry-Perot cavity, which is considered known to a person skilled in the art.

The demodulating means process the received modulated reflection. The demodulating means can be based on a correlation architecture having branches, where each branch has an oscillator, a mixer and a correlator. Each branch is dedicated to processing a frequency area around a cavity resonance frequency. A baseband processor can process the output signals from the branches, to obtain the quantity.

It is noted that the same article discloses a system replacing paper price labels for retail businesses. This system has a plurality of electronic price tags and a station to provide the price tags with pricing information. The price tag has a display for displaying the provided pricing information and a battery to provide power for its electronic circuits and the display. The problem addressed by the system is that of distributing the pricing information wirelessly to price tags. The system comprises active, battery-powered price tags with a relatively high complexity and a relatively high cost.

Advantageously, the passive device has an identity, the passive device being further arranged for modulating the reflection in dependence of the identity, the demodulating means being further arranged for obtaining the identity from the reflection. The system may comprise a plurality of devices, where the station can wirelessly identify each device, because the device reveals its identity by modulating the reflection. The identity of the device can for example be one or more of its dimensions causing one or more specific spectral components to be reflected. The dimensions of the device give it an ultra wide band fingerprint. The device may serve as a key with a unique identity when the shape of the device is sufficiently complex. The shape may comprise a meander, a comb, a grating, a spiral, a maze, a labyrinth, or a concentric structure, or a plurality or combinations thereof.

Advantageously, the cavity has physical dimensions, the quantity being determined by the ratio of at least two of the physical dimensions. This can decrease the sensitivity of the interrogation to disturbances from the environment. An example is that the size of a device will in general vary with temperature. By determining the quantity as the ratio of two suitable physical dimensions of the cavity, the influence of the temperature is reduced. This also applies to the identity, improving the identification of the device.

Advantageously, the demodulating means comprise spectral component analysis means for obtaining a spectral component of the reflection, the spectral component analysis means being coupled to the receiving means. The spectral component analysis means may comprise a correlator and an integrator. This provides for relatively simple demodulation means.

Advantageously, the spectral component analysis means comprise:

- an analog to digital converter for converting the received reflection into a digital signal, the analog to digital converter being coupled to the receiving means, and
- a Fourier transformer for performing a Fourier transform on the digital signal. This may optimize the demodulating means, as it allows a processor to operate on many branches, alleviating the need to have full demodulators for each branch. Another advantage is that processing of the aggregate of signals of the branches is simplified.

Advantageously, the demodulating means comprise a replica of the cavity. This measure can provide a relatively simple demodulator. The replica is not modulated by the quantity. The reflection is guided to the replica. In dependence of the interrogated quantity, the replica will resonate in response to being excited with the reflection. Detecting a resonant cavity is relatively simple. The demodulating means may also comprise other replicas each with another quantity that are modulated with fixed deviations from the cavity.

Advantageously, the electromagnetic pulse comprises a light beam and the passive device comprises a non-linear optical unit for transforming the light beam into the ultra wide band reflection. The light beam may propagate with relatively little decay through a medium between the station and the device. Therefore, relatively much energy arrives at the device. The non-linear optical unit converts the energy into the ultra wide band reflection. One example of a medium in which a light beam has relatively little decay is a human body. The light beam may originate from a laser. The laser may provide sub picosecond infrared pulses with wavelengths in the range of 700-1500 nanometers. The passive device may work like a photo-conductive THz antenna made of a semi-insulating material like GaAs, which is sandwiched as asymmetric metal-insulator-metal diode. Due to the asymmetry, a built-in potential discharges as the optical infrared beam pulses hit on it. The sub picoseconds electrical pulse gets filtered by the cavity structure. The non-linear optical unit may comprise LiTaO_3 , in which optical rectification generates a pulsed THz beam. This is known as Cherenkov rectification. Alternatively, the passive device may comprise Si with on one side a built-in surface electric field. Due to the Frans-Keldysh effect optical rectification takes place close to the surface. Still alternatively, the passive device may comprise pn junctions, photonic band gap structures, or photonic crystals.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the interrogation system will be further elucidated and described with reference to the drawing.

Fig. 1 is a block diagram of an interrogation system in accordance with the invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

In Fig. 1, an interrogation system 100 comprising a station 101 and a passive device 102 is shown schematically. The passive device 102 has a quantity 103. Examples of a quantity 103 are a position, an orientation, an angle, a temperature, a gas pressure, a fluid pressure, a fluid flow, a sound pressure, a force, acceleration, gravity, humidity and a light intensity. The station 101 and the passive device 102 can both be either portable, mobile or stationary. The station 101 can interrogate the passive device 102 for the quantity 103. The interrogation is initiated from the station 101 with the transmittal of an electromagnetic pulse 105. The electromagnetic pulse 105 may have a wide frequency spectrum, but it may alternatively have a relatively narrow frequency spectrum. The station 101 comprises

transmitting means 104 to transmit the electromagnetic pulse 105. The electromagnetic pulse 105 propagates through a medium to the passive device 102. The station 101 comprises receiving means 106 for receiving from the passive device 102 a modulated ultra wide band reflection 107 of the electromagnetic pulse 105. This is described in more detail below. The station 101 comprises demodulating means 108 for demodulating the reflection and obtaining the quantity 103. The demodulating means 108 may be based on the known principles for demodulation and are coupled to the receiving means 106.

Ultra wide band may be defined as a property of a signal with a spectral power density. The spectral power density has a maximum value at a central frequency. The spectral power density decreases to a fraction of the maximum value, both at an upper frequency larger than the central frequency, and at a lower frequency smaller than the peak frequency.

In one example of a definition of ultra wide band, the signal has the property if the difference between the upper frequency and the lower frequency exceeds a certain frequency limit. In a typical definition, the fraction equals -10 dB and the frequency limit equals 0.5 GHz.

In another example of a definition of ultra wide band, the signal has the property if the difference between the upper frequency and the lower frequency divided by the central frequency exceeds a ratio. In a typical definition, the fraction equals -10 dB and the ratio equals 0.25.

The electromagnetic pulse 105 falls on the passive device 102 comprising a cavity 109. The cavity 109 has a physical property 110, which is dependent on the quantity 103. The physical property can be one or more of the dimensions of the cavity, an electric field, a magnetic flux, a magnetic susceptibility, a dielectric constant, a polarization, or an atomic lattice. The passive device 102 reflects part of the energy of the electromagnetic pulse 105. The reflection is depending on the shape, the geometry and the materials of the passive device 102 and of the cavity 109. Because of the dependency of the cavity 109 on the quantity 103, the reflection is also depending on the quantity 103. Phrased differently, the cavity 109 modulates the reflection in dependence of the quantity 103. In addition the reflection may depend on other factors. The passive device 102 reflects the modulated ultra wide band reflection 107 to the station 101.

Having a spherical passive device 102 may decrease the angular dependence to the incident electromagnetic pulse 105. This may be characterized as Mie scattering, with dielectric spheres. This is considered known to a person skilled in the art. The passive device 102 may alternatively be a dielectric rod, a metallic shell, a slot antenna backed by a

hemispherical cavity, an array of reflecting cantilevers. For an electromagnetic pulse 105 with spectral components in the THz region, the passive device 102 can be smaller than a millimeter. The passive device 102 may be manufactured with MEMS technology.

Interrogation can take place wirelessly and remote, because the station 101
5 and the passive device 102 only need to be coupled by a medium suited for propagating the electromagnetic pulse 105 and the modulated ultra wide band reflection 107. As the device is passive it may be relatively cheap.

The passive device 102 with a cavity resonator structure offers antenna and sensing functionalities in a single physical component. The purpose is to simplify the
10 structure of the passive device 102 to make them suitable for lower costs and lower power. In a crowded network environment, passive devices showing a single resonant property may not be uniquely addressed without extensive multiple access communication (MAC) protocols. A
passive device with a single resonance may need extensive electronics with additional components, raising costs and power consumed. Therefore, passive cavity structures may be
15 employed possessing differing resonances or a multitude of resonances, with each device having unique spectral features. These features are still contained within a single component passive device. In order to address these devices effectively and simultaneously the station 101 may probe the passive devices 102 with ultra wide band electromagnetic pulses 105. The passive devices 102 communicate using spectrally the principle of code division multiple
20 access (CDMA), using their unique resonance features. Since ultra wide band pulses have a broad spectral coverage, all of the CDMA components of the passive devices 102 can be probed simultaneously.

Since the main resonances of the passive cavities 109 are perturbed by the sensed quantities 103 from the environment, the time-dependent modulated parts of the
25 reflected signals 107 from the devices 102 carry the sensed information back to the station 101 and to a main network to help provide ambient intelligence functionality. The station 101 may be connected to a conventional network, such as Ethernet or WiFi, which provides the means for data and signal processing and communications to elsewhere.

One example is that a cavity 109 boundary changes its position in dependence
30 of the quantity 103, causing a change in the geometry of the cavity.

The passive device 102 may have an identity 111. The passive device 102 may be further arranged for modulating the reflection in dependence of the identity 111. This effectively provides the station 101 with a fingerprint of the passive device 102. The system may comprise at least one other passive device 102 having another identity 111 and having

another quantity 103. The station 101 may interrogate both the passive device 102 and the at least one other passive device 102 substantially simultaneously. The station 101 may interrogate both devices for their respective quantity 103 with a single electromagnetic pulse 105. The demodulating means 108 may be further arranged for obtaining the identity 111
5 from the reflection.

A single interrogation system 100 may comprise a relatively large amount of passive devices. As the passive devices can be relatively cheap the interrogation system 100 may be relatively cheap, even when containing for example thousands of passive devices. The wireless coupling between the station 101 and each of the passive devices avoids the
10 costs of a wired coupling. This is also advantageous if the passive devices move with respect to the station 101.

The cavity 109 may have physical dimensions 112. The quantity 103 may be determined by the ratio of at least two of the physical dimensions 112. Instead of the quantity 103 also the identity 111 may be determined by the ratio of at least two of the physical
15 dimensions 112. Using a ratio may decrease the sensitivity of the interrogation system 100 for spurious effects.

The demodulating means 108 may comprise spectral component analysis means 113 for obtaining a spectral component of the reflection. The spectral component analysis means 113 are coupled to the receiving means 106.

20 The spectral component analysis means 113 may comprise an analog to digital converter 115 and a Fourier transformer 117. The analog to digital converter 115 converts the received reflection into a digital signal. The analog to digital converter 115 is coupled to the receiving means 106. The Fourier transformer 117 performs a Fourier transform on the digital signal.

25 The demodulating means 108 may comprise a replica 118 of the cavity 109. The replica may provide for relatively simple demodulation means 108. The replica 118 may also increase a sensitivity of the demodulation means 108 for detecting changes in the quantity 103.

30 The electromagnetic pulse 105 may comprise a light beam 119. The passive device 102 may comprise a non-linear optical unit 120 for transforming the light beam 119 into the ultra wide band reflection.

The interrogation system 100 may also include means for other known modulation techniques.

It is noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

CLAIMS:

1. An interrogation system (100) comprising:

- a station (101) for obtaining a quantity (103) of a passive device (102) by interrogating the passive device (102), the station (101) comprising:
 - transmitting means (104) for transmitting an electromagnetic pulse (105);
 - 5 - receiving means (106) for receiving from the passive device (102) a modulated ultra wide band reflection (107) of the electromagnetic pulse (105);
 - demodulating means (108) for demodulating the reflection and obtaining the quantity (103), the demodulating means (108) being coupled to the receiving means (106), and
- 10 - the passive device (102) for transmitting the modulated ultra wide band reflection (107) to the station (101), the passive device (102) comprising a cavity (109) for modulating the reflection (107) in dependence of the quantity (103), the cavity (109) having a physical property (110), the physical property (110) being dependent on the quantity (103).

15 2. An interrogation system (100) as claimed in claim 1, characterized in that the passive device (102) has an identity (111), the passive device (102) being further arranged for modulating the reflection in dependence of the identity (111), the demodulating means (108) being further arranged for obtaining the identity (111) from the reflection.

20 3. An interrogation system (100) as claimed in claim 1, characterized in that the cavity (109) has physical dimensions (112), the quantity being determined by the ratio of at least two of the physical dimensions (112).

25 4. An interrogation system (100) as claimed in claim 1, characterized in that the demodulating means (108) comprise spectral component analysis means (113) for obtaining a spectral component of the reflection (107), the spectral component analysis means (113) being coupled to the receiving means (106).

5. An interrogation system (100) as claimed in claim 4, characterized in that the spectral component analysis means (113) comprise:

- an analog to digital converter (115) for converting the received reflection into a digital signal, the analog to digital converter (115) being coupled to the receiving means (106), and
- a Fourier transformer (117) for performing a Fourier transform on the digital signal.

6. An interrogation system (100) as claimed in claim 1, characterized in that the demodulating means (108) comprise a replica (118) of the cavity (109).

7. An interrogation system (100) as claimed in claim 1, characterized in that the electromagnetic pulse (105) comprises a light beam (119) and the passive device (102) comprises a non-linear optical unit (120) for transforming the light beam (119) into the ultra wide band reflection (107).

8. A station (101) for use in the interrogation system (100) according to any one of the claims 1 to 7.

9. A passive device (102) for use in the interrogation system (100) according to any one of the claims 1 to 7.

10. A method of obtaining a quantity (103) of a passive device (102) with a cavity (109) having a physical property (110) by interrogating the passive device (102), the method comprising:

- transmitting an electromagnetic pulse (105) to the passive device (102);
- receiving a modulated ultra wide band reflection (107) of the electromagnetic pulse (105) as modulated by the cavity (109) in dependence of the physical property (110) being affected by the quantity (103);
- demodulating the modulated ultra wide band reflection (107) received; and
- obtaining the quantity (103).

ABSTRACT:

In an interrogation system 100 with a station 101 and a passive device 102, the station 101 interrogates the passive device 102 for a quantity 103 by transmitting an electromagnetic pulse 105. The passive device 102 has a cavity 109 that influences an ultra wide band reflection of the electromagnetic pulse 105 by the passive device 102. The
5 quantity 103 of the passive device 102 influences a physical property 110 of the cavity 109. The station 101 receives and analyses the reflection to obtain the quantity 103.

Fig. 1

1/1


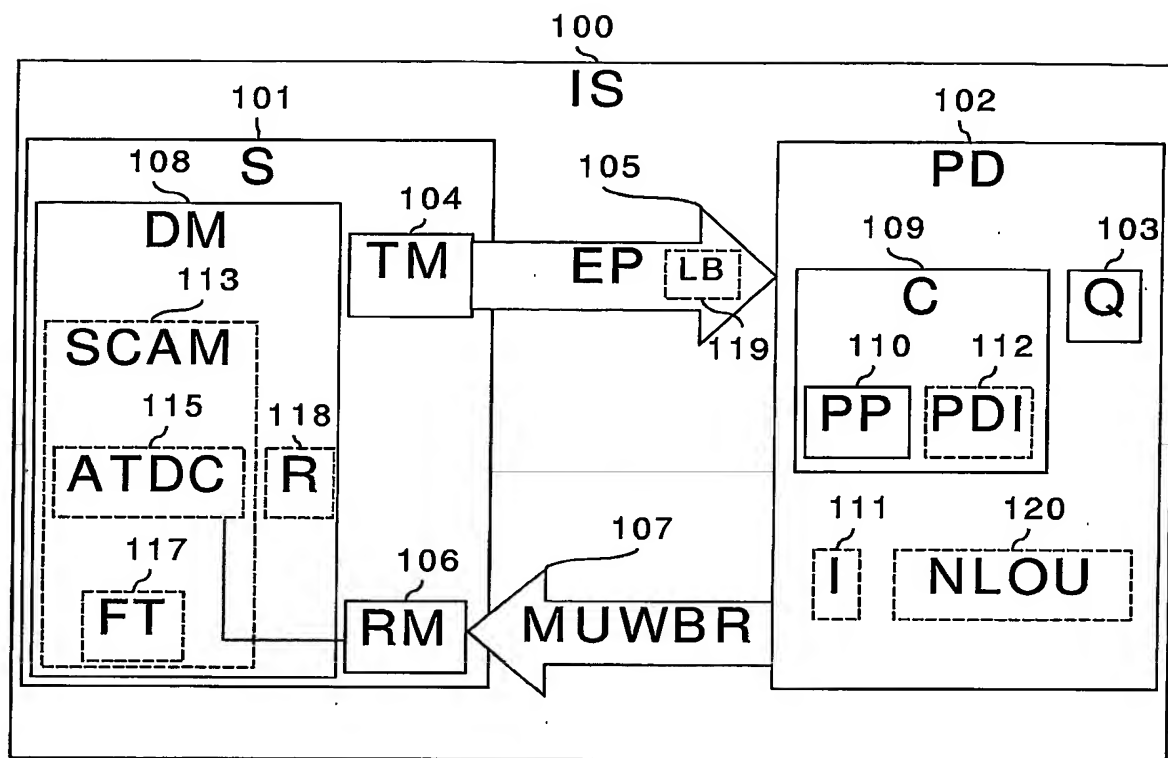


FIG.1

PCT/IB2004/051789

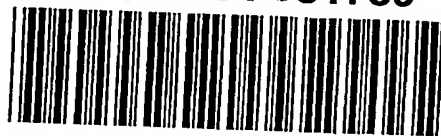

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.